



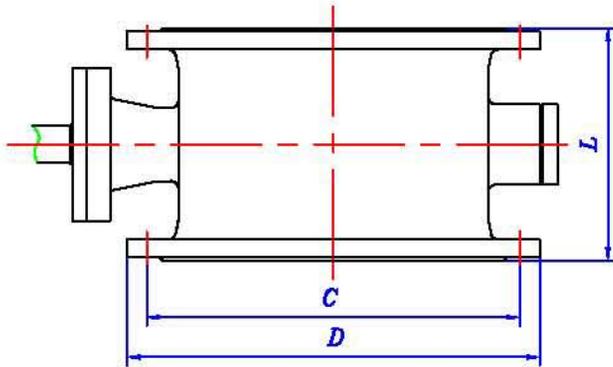

Butterfly swing check valves PN16/PN10

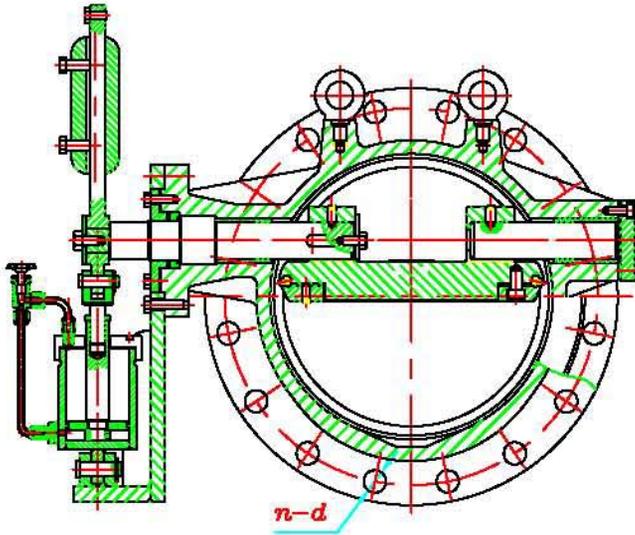

Flanged end	DIN3202-F4
F-F dimension	DIN2501

Unit: MPa

WORKING PRESSURE		1.6	1.0	MPa
TEST PRESSURE	BODY	2.4	1.5	MPa
	SEAT	1.76	1.1	

Component	Material
Body	Ductile Iron
Seat Seating Face	Brass/ Stainless Steel
Disc	Ductile Iron
Ring Fitted to Disc for Seal	Stainless Steel
Shaft	Stainless Steel
Shaft Bearings	S.S. with PTEF lining
Cylinder	Carbon steel
Lever	Ductile Iron
Balance weight	Cast iron

Dimensions: PN16 / PN10

	mm											
Size	100	125	150	200	250	300	350	400	450	500	600	700
L	190	200	210	230	250	270	290	310	330	350	390	430
D	220	250	285	340	405/395	460/445	520/505	580/565	640/615	715/670	840/785	910/895
C	180	210	240	295	355/350	410/400	470/460	525/515	585/565	650/620	770/720	840
n-d	8-18	8-18	8-23	12-23 / 8-23	12-27 / 12-23	12-27 / 12-23	16-27 / 16-23	16-30 / 16-27	20-30 / 16-27	20-33 / 20-27	20-36 / 20-30	24-36 / 24-30