
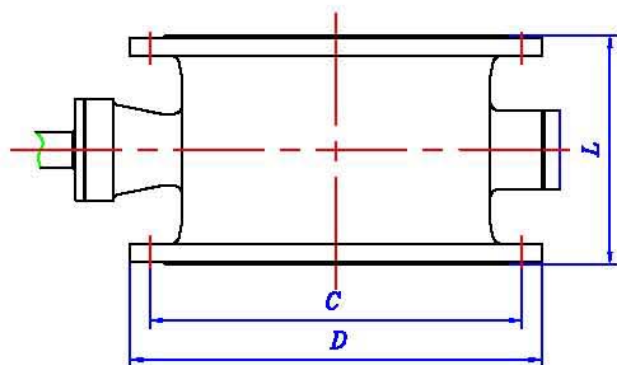


Butterfly swing check valves PN16/PN10

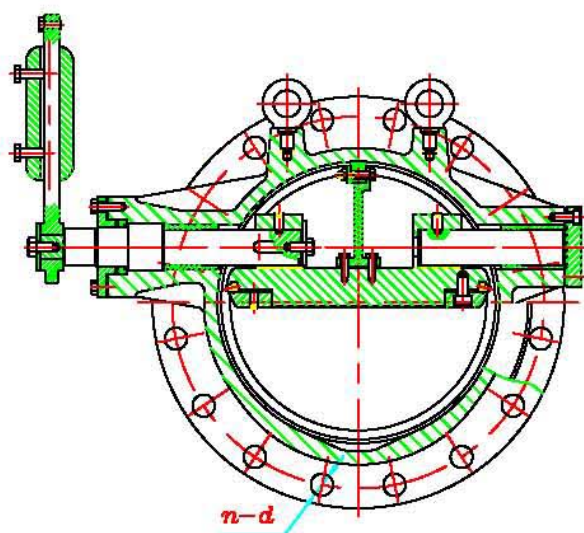

Flanged end	DIN3202-F4			
F-F dimension	DIN2501			
Unit: MPa				
WORKING PRESSURE	1.6	1.0	MPa	
TEST PRESSURE	BODY	2.4		1.5
	SEAT	1.76		1.1

Component	Material
Body	Ductile Iron
Seat Seating Face	Brass/ Stainless Steel
Disc	Ductile Iron
Ring Fitted to Disc for Seal	Rubber
Shaft	Stainless Steel
Shaft Bearings	S.S. with PTEF lining
Lever	Ductile Iron
Balance weight	Cast iron

Dimensions: PN16 / PN10

	mm									
Size	100	125	150	200	250	300	350	400	450	500
L	190	200	210	230	250	270	290	310	330	350
D	220	250	285	340	405/395	460/445	520/505	580/565	640/615	715/670
C	180	210	240	295	355/350	410/400	470/460	525/515	585/565	650/620
n-d	8-18	8-18	8-23	12-23/ 8-23	12-27/ 12-23	12-27/ 12-23	16-27/ 16-23	16-30/ 16-27	20-30/ 16-27	20-33/ 20-27