
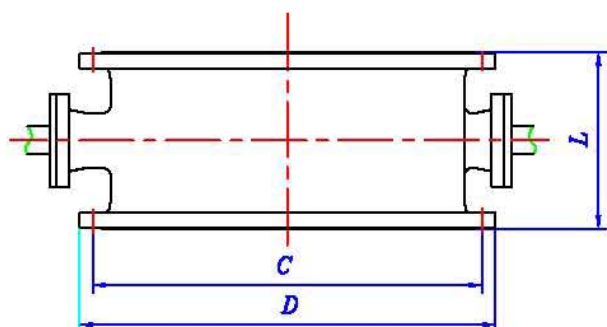


Butterfly swing check valve PN16/PN10

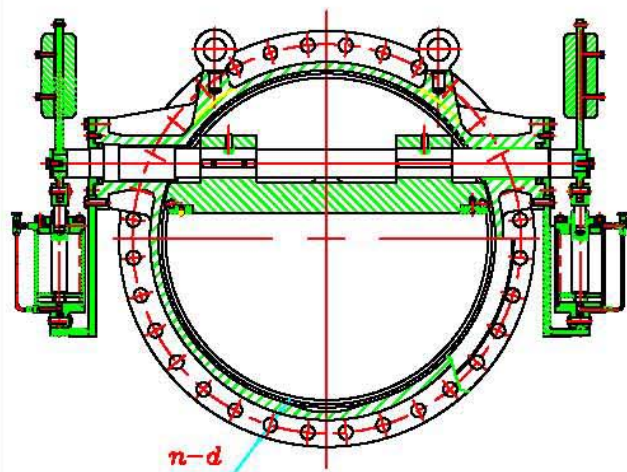

<i>Flanged end</i>	<i>DIN3202-F4</i>		
<i>F-F dimension</i>	<i>DIN2501</i>		
<i>Unit: MPa</i>			
<i>WORKING PRESSURE</i>	<i>1.6</i>	<i>1.0</i>	<i>MPa</i>
<i>TEST PRESSURE</i>	<i>BODY</i>	<i>2.4</i>	
	<i>SEAT</i>	<i>1.76</i>	

Component	Material
Body	Ductile Iron
Seat Seating Face	Brass/ Stainless Steel
Disc	Ductile Iron
Ring Fitted to Disc for Sealing	Rubber
Shaft	Stainless Steel
Shaft Bearings	S.S.with PTFE lining
Cylinder	Carbon steel
Lever	Ductile Iron
Balance weight	Cast iron

Dimensions: PN16 / PN10

	mm							
Size	800	900	1000	1200	1400	1600	1800	2000
L	470	510	550	630	710	790	870	950
D	1025/1015	1125/1115	1255/1230	1485/1455	1685/1675	1930/1915	2130/2115	2345/2325
C	950	1050	1170/1180	1390/1380	1590	1820	2020	2230
n-d	24-39/	28-39/	28-42/	32-49/	36-49/	40-56/	44-56/	48-62/
	24-33	28-33	28-36	32-39	36-42	40-48	44-48	48-48