

多功能水力控制阀

Multi-function Hydraulic Control Valve

一、产品介绍 About the product


该系列阀的动作性能与水力控制阀相似。它主要是利用管路内的自身压力，通过上下腔控制室的压力差来控制主阀盘的运动，再通过旁通管路和各种不同构造的导阀起不同功能产生各系列阀，从而达到各种要求之目的。该阀分别为消声/消锤/缓开/缓闭止回阀、水位控制阀、减压阀、安全/泄压阀、电动遥控阀等用于各种不同的场合，自动保证管网的安全运行，广泛用于建筑、消防、水厂、暖通、钢铁、电力、石油、化工等系统管网。

The motion performance of this valve is similar to that of the hydraulic control valve. It utilizes the self pressure inside of the pipeline and the pressure differential between the control rooms of upper and lower cavities to control the movement of the main disc and forms each series valve via the different function of the by-pass pipeline and the pilot valves of various different structures so as to get to the target of various requirements. Available with silencing/hammer removing/slow-open/slow-close check valves, water level control valve. Pressure runing of the pipe network and suitable for the pipe network of buildings, fire-fighting, waters works, warming, steel and iron, electric power, petroleum, chemical industry etc.

二、产品特点 product features

- 具有缓开功能，可解决传统的人关阀开泵；
- 具有缓闭功能，可人为调节关闭时间同，自动实现缓闭，消除水锤；
- 具有良好密封性能，关闭后可达到滴水不漏；
- 运作灵敏、安全可靠，不会出现失控现象；
- 无须人为操作，在管网运行的全过程是均为自动工作；
- 阀内外及所有易腐蚀件均采用环氧气树脂粉体涂装；
- 可拆卸阀座结构巧妙，维修更换方便（无须整台阀门拆除）；
- 在管路中可任意立式或卧式安装其可靠性不变。
- Of slow-open function, setting the conventional problem for people to close valve and open pump.
- Of slow-close function, capable of artificially adjusting the close time, automatically realizing slow-close and removing water hammer.
- Of a good sealing performance and no one drop of water leaks after being closed.
- Sensitive, safe and reliable, motion. Without any out-of-control condition.
- No need to artificially operate, all automatic work during the complete process for the pipe network to run.
- Both outside and inside of the valve and the all easily corroded parts are coated with epoxy resin powder.
- Removable seat ring of an exquisite structure, easy repair and re-placement (no need to remove whole valve).
- Vertically or horizontally mountable in the pipeline, with the reliability kept unchanged.

五、结构简图 Brief figure of structure


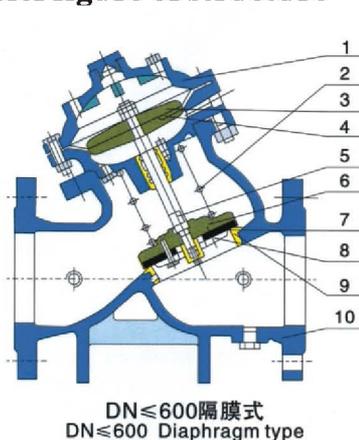


三、主要性能和规范 Performance standard

公称压力PN(MPa)	1.0	1.6	2.5
强度试验 Strength test(Mpa)	1.5	2.4	3.8
密封试验 Seal test(Mpa)	1.1	1.76	2.75
气密封实验 Air-tightness test(Bar)	6	0.6	0.6
工作温度 Working temperature	< 80℃		
适用介质 Suitable media	水及物理、化学性质类似于水的介质 Water and the media with physical and chemical similar to those of water		

四、主阀流量曲线图

Flow curve of main valve

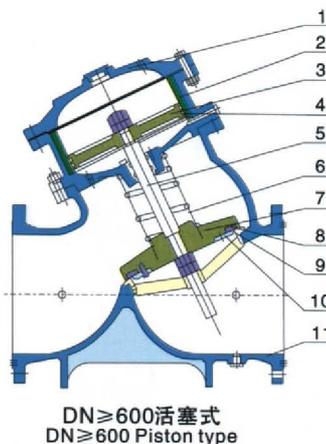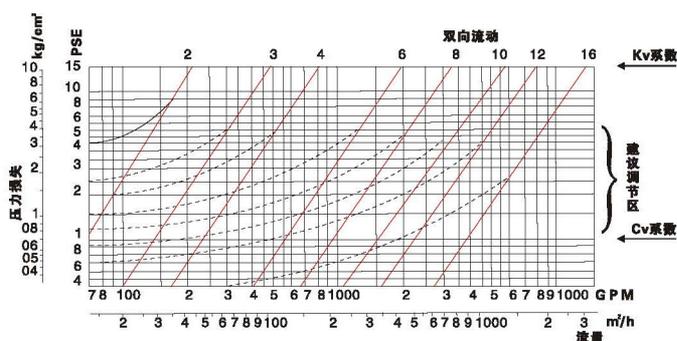

多功能水力控制阀

Multi-function Hydraulic Control Valve

六、主要零件材料Materials of main parts


隔膜式Diaphragm type

序号 No	部件名称Part	选用材料Materials
1	阀盖Bonnet	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass
2	弹簧Spring	弹簧钢、不锈钢 Spring steel, stainless
3	膜片压板 Pressboard of diaphragm	球墨铸铁、碳钢、不锈钢、铜 Ductile iron, carbon steel, stainless steel, brass
4	膜片Diaphragm	丁腈尼龙强化橡胶、三元乙丙尼龙强化橡胶 Acrylonitrile nylon reinforced rubber, ternary ethylene propylene copolymer reinforced rubber
5	阀杆Stem	不锈钢、不锈钢 Stainless iron, stainless
6	阀瓣Disc	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass
7	密封垫Sealing pad	丁腈橡胶 NBR rubber
8	密封垫压板 pressboard of sealing pad	球墨铸铁、碳钢、不锈钢、铜 Ductile iron, carbon steel, stainless steel, brass
9	阀座Seating ring	本体、铜合金、不锈钢 Body, copper alloy, stainless steel
10	阀体Body	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass

活塞式piston type

序号 No	部件名称Part	选用材料 Materials
1	阀盖Bonnet	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass
2	缸套Cylindersleeve	不锈钢SS
3	活塞Piston	球墨铸铁Ductalloy
4	密封圈Seal ring	丁腈橡胶 NBR rubber
5	阀杆Stem	不锈钢、不锈钢 Stainless iron, stainless
6	弹簧Spring	弹簧钢、不锈钢 Spring steel, stainless
7	阀瓣Disc	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass
8	密封垫Sealing pad	丁腈橡胶 NBR rubber
9	阀座Seating ring	本体、铜合金、不锈钢 Body, copper alloy, stainless steel
10	密封压板 Seal pressboard	球墨铸铁、碳钢、不锈钢、铜 Ductile iron, carbon steel, stainless steel, brass
11	阀体Body	灰铸铁、球墨铸铁、碳钢、不锈钢、铜 Gray cast iron, ductile iron, carbon steel, stainless steel, brass

七、结构说明Statement

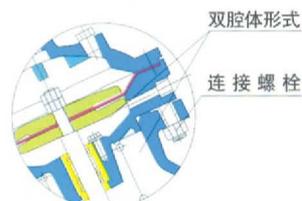

双腔体形式缓开 缓闭

采用不同用途可以将两个腔室彼此隔离或者相通，以实现缓开、缓闭或速闭等辅助功能，在一定程度上阻碍水锤的产生或缓解水锤的力度，保护阀后的其他设备不受损坏。除此之外，阀盖与上腔室连为一体，使得阀盖、上腔室、阀杆、阀盘成为整体，只要松开阀体与阀盖的连接螺栓，即可将其一并取出方便维修及更换易损件。


Use of different purposes can separate or make two cavities through so as to realize slow-open, slow-close or quick-close etc. auxiliary functions, prevent water hammer from being produced or reduce its strength to a certain extent and protect the other equipments after the valve from getting damaged. Besides, the integrated bonnet and upper cavity makes bonnet, upper cavity stem and disc an integrity, which can be wholly taken out for repair or replacement by loosening the joint bolt between body and bonnet body.



采用双道O形环

采用小活塞缸式，摩擦小，运动灵活，活塞用双道O型密封环，阀门关闭时间可在3-60秒内任意调节。

Use of small piston cylinder features small frictional force and flexible motion, the piston uses dual-seal rings and valve close time can be adjusted within.

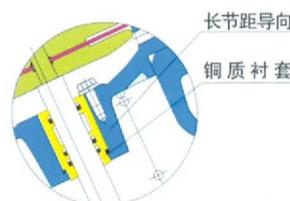


中段长节距导向平稳灵活

采用阀杆两头导向的结构，中段长节距导向，避免了阀盖与阀座上的导向孔因加工或安装不同心，导致阀杆运动受阻，易卡死现象，中段导向套上阀体整体绕铸，加工精度得到保证，同时在与阀杆的接触面间加一铜质衬套，保证阀杆表面不被磨损，擦毛，使阀杆运动自如，平稳灵活、可靠。

Used of the structure of two-ends guide of the stem and the long pitch guide in the middle section avoids the resisted movement and easy jamming with the stem due to the eccentric process or installation of the guide hole on both bonnet and seat ring the integral casting between the guide sleeve in the middle section and the upper body makes the process accuracy ensured and a copper bush placed between the contacting faces with the stem ensures the stem surface not to be worn out and scraped so as to have it feel stably flexibly and reliably move.

活塞式 Piston type



缓闭副盘


主阀盘

采用副密封结构，主密封阀盘随着介质的压力大小自动打开或关闭。副密封阀盘受到控制室介质的影响，随水锤峰值到达时间的长短自行关闭，从而消除水击现象。


Used for a sludge treatment plant to drain out the sludge and waste water on the bottom of a water pool as well as the muddy sand and dirt deposited therein. The diaphragm made of nylon reinforced rubber and designed into an angular structure is helpful for the sludge to be successfully drained out.

F745X遥控浮球阀

F745X Remote Control Floating Valve

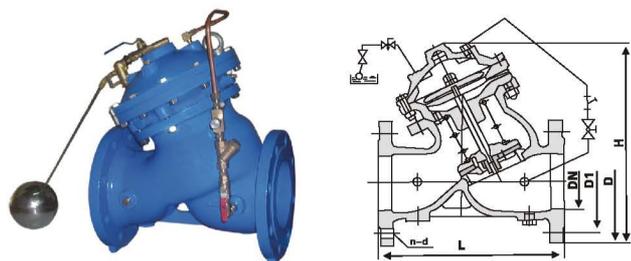

隔膜式

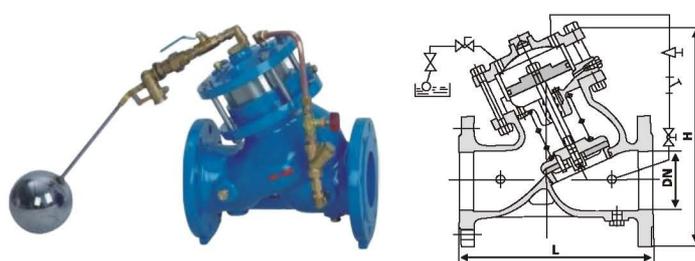

活塞式

一、用途 Purpose

安装在水池、水塔的进水管中，当水池水位达到预设水位时，阀门自动关闭；当水位下降时，阀门自动开启补水。

Mounted in the water inter pipeline of a water pool or tower. The valve will automatically close when the level of the pool reaches the preset one and open to supplement water when the level lowers.

二、特点 Feature

1、关闭严密可靠。采用牢固的O型环密封，利用液压控制原理，使阀瓣关闭力与进水压力成正比，密封可靠性高。

2、过流量大。阀体采用全通道流线型设计，流体阻力小，流量大。

3、运行安全。利用水力操作，可自动控制水塔或水池的液面，液位控制准确度高。

4、使用维护方便。主阀安装在水池外面，调试检查方便，维修简单。

1. Tightly and reliably closed. Use of secure O-ring seal and hydraulic control principle in pressure, leaving a high reliability of the seal.

2. Big flow. The valve body is so designed as the full-path stream-line type, causing a small fluid resistance and a big flow.

3. Safe running. Use of hydraulic operation can automatically control the level of the water pool or tower very accurately.


4. Easy use and maintenance. Installation outside of the water pool of the main valve makes debugging and checking easy and maintenance simple.

三、主要外形尺寸及连接尺寸

Main external and connecting dimensions

DN	L	D			D ₁			n-d			H
		1.0MPa	1.6MPa	2.5MPa	1.0MPa	1.6MPa	2.5MPa	1.0MPa	1.6MPa	2.5MPa	
50	205	165	165	165	125	125	125	4-18	4-18	4-18	293
65	220	185	185	185	145	145	145	4-18	4-18	8-18	328
80	245	200	200	200	160	160	160	8-18	8-18	8-18	364
100	295	220	220	235	180	180	190	8-18	8-18	8-22	418
125	330	250	250	270	210	210	220	8-18	8-18	8-26	481
150	360	285	285	300	240	240	250	8-22	8-22	8-26	543
200	405	340	340	360	295	295	310	8-22	12-22	12-26	673
250	465	395	405	425	350	355	370	12-22	12-26	12-26	792
300	500	445	460	485	400	410	430	12-22	12-26	12-30	927
350	575	505	520	555	460	470	490	16-22	16-26	16-30	957
400	635	565	580	620	515	525	550	16-26	16-30	16-33	1188
450	680	615	640	670	565	585	600	20-26	16-30	16-36	1218
500	720	670	715	730	620	650	660	20-26	20-33	20-36	1256
600	825	780	840	845	725	770	770	20-30	20-36	20-39	1600
700	970	895	910	960	840	840	875	24-30	24-36	24-42	1750
800	1120	1015	1025	1085	950	950	990	24-33	24-39	24-48	1900
900	1220	1115	1125		1050	1050		28-33	28-39		2100
1000	1320	1230	1485		1160	1170		28-36	28-42		2400
1200	1620	1455			1380			32-39			2860
1400	2020	1675			1530			36-42			3200

四、安装示意图 Schematic diagram of installation

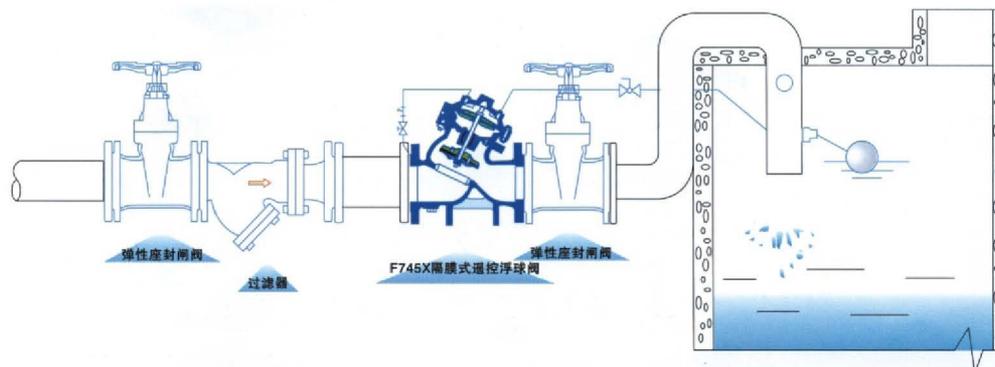

注：安装示意图中弹性座封闸阀或蝶阀任选，建议≥DN350蝶阀

Note: Either elastic seat ring sealed gate valve or butterfly valve can be selected in the schematic diagram of installation. Recommended to select the butterfly valve in case of ≥ DN350