




厦门泽瑞进出口有限公司

Tel:+86-592-5616848

5616805

XIAMEN JIREH INDUSTRIAL CO., LTD.

Fax:+86-592- 5616958

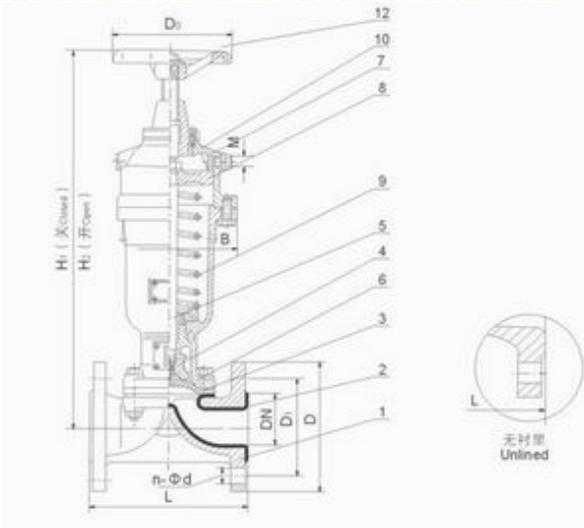

Design & manufacture: GB 12239

Face to face: GB 12221, JB1688

Flanged ends: GB4216, JB78

Test for lining layer: Electro spark detecting

Test: GB/T 13927

Body & Bonnet	Cast Iron, Carbon Steel, Stainless Steel
Lining	Unlined, Fluorine Plastic
Diaphragm	Fluorine Plastic
Disc	Cast Iron, Stainless Steel
Stem	Carbon Steel, Stainless Steel

DN	L	D	D1	D0	Z-φd	H1	Air pressure Mpa	Weight kg
25	145	115	85	120	4-14	306	0.4	7.5
32	160	140	100	140	4-18	-	0.4	14.3
40	180	150	110	140	4-18	415	0.4	16.5
50	210	165	125	160	4-18	458	0.4-0.5	24
65	250	180	145	160	4-18	-	0.4-0.5	30
80	300	200	160	200	4-18	642	0.4-0.5	51
100	350	220	180	240	8-18	710	0.4-0.5	92
125	400	250	210	320	8-18	804	0.4-0.5	148
150	460	285	240	320	8-22	920	0.5	200
200	570	340	295	400	8-22	1145	0.5	275

1105 Block B Yucheng Bldg., No. 51 Dongdu Road, Xiamen, China

E-mail: [jireh@jirehvalve.com](mailto:jireh@jirehvalve.com)

<http://www.jirehvalve.com>