





德标Y型过滤器/法兰 EN&DIN Y-strainer with flange



尺寸 Size(DN)	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
H	85	95	110	125	145	155	170	205	230	270	318	400	555	620	700	820
H1	93	115	134	157	193	200	225	255	300	355	407	520	780	900	985	1120
重量 Weight (kg)	PN16	2.8	3.8	5.3	7.2	9	11.8	16.2	22.4	35	45.4	62	132	220	330	540
	PN25	2.8	3.8	5.3	7.2	9	11.8	16.8	24.0	38.8	50.1	68	142.6	233.4	350	574
	PN40	2.8	3.8	5.3	7.2	9	11.8	17.4	24.6	39.7	52.5	70.4	153	250	360	614
KV		6.3	11	17.5	28	44	69	118	178	270	420	620	1100	1700	2500	3400

主要零部件材料 Main components materials							标准 Standard	
阀体/阀盖 Body/Bonnet	滤网 Screen	螺栓 Bolt/螺母 Nut	垫片 Gasket	螺母 Nut	适用介质 Suitable medium	适用温度 Suitable temp	设计 Design	
GS-C25/GS-C25N/GP240GH/1.0619	SS304	A193 B7/A194 2H	SS304+ Graphite	SS304	水、石油 天然气 water oil gas	≤425℃	MFT S' 标准Standard	
1.4308	SS304	A193 B8/A194 8	SS304+ Graphite/PTFE	SS304	腐蚀性介质 Corrosive Media	≤200℃	F-F 结构长度标准 END-END	
1.4408	SS316	A193 B8M/A194 8M	SS304+ Graphite/PTFE	SS316L	腐蚀性介质 Corrosive Media	≤200℃	EN558 - 1/DIN3202F1	
							法兰 Flange	
							EN1092	
							检测试压标准 Test	
							EN12266	

德标Y型过滤器/焊接 EN&DIN Y-strainer with welding

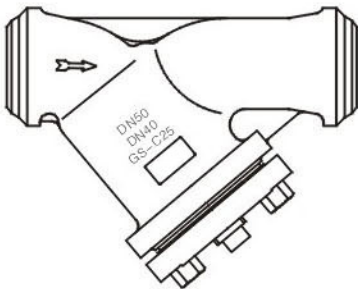

尺寸 Size(DN)	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
H	85	95	110	125	145	155	170	205	230	270	318	400	555	620	700	820
H1	93	115	134	157	193	200	225	255	300	355	407	520	780	900	985	1120
重量 Weight (kg)	PN16	1.9	2.8	3.8	4.8	6.2	8.3	11.8	17.8	28.6	37	51.2	120	203	308	510
	PN25	2.0	2.9	4.0	5.0	6.5	8.6	12.2	18.5	29.7	38.1	53.4	123	208	315	540
	PN40	2.1	3.0	4.3	5.4	7.0	9.1	13.0	19.8	31.4	40.3	58.8	129	223	348	587
KV		6.3	11	17.5	28	44	69	118	178	270	420	620	1100	1700	2500	3400

主要零部件材料 Main components materials							标准 Standard	
阀体/阀盖 Body/Bonnet	滤网 Screen	螺栓 Bolt/螺母 Nut	垫片 Gasket	螺母 Nut	适用介质 Suitable medium	适用温度 Suitable temp	设计 Design	
GS-C25/GS-C25N/GP240GH/1.0619	SS304	A193 B7/A194 2H	SS304+ Graphite	SS304	水、石油 天然气 water oil gas	≤425℃	MFT S' 标准Standard	
1.4308	SS304	A193 B8/A194 8	SS304+ Graphite/PTFE	SS304	腐蚀性介质 Corrosive Media	≤200℃	F-F 结构长度标准 END-END	
1.4408	SS316	A193 B8M/A194 8M	SS304+ Graphite/PTFE	SS316L	腐蚀性介质 Corrosive Media	≤200℃	EN558 - 1/DIN3202F1	
							连接标准 End dimensions	
							EN12627	
							检测试压标准 Test	
							EN12266	