


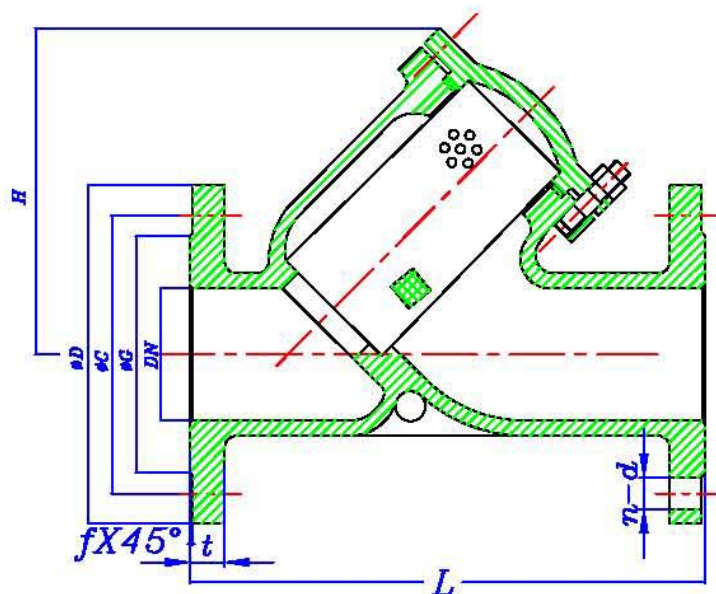

MPa

Available Standard		B
Working Pressure		1.6
Test Pressure	Body	2.4
	Seat	1.76
Reseat Pressure		1.6~0.35

7.	Cover	Cast iron
6.	Gasket	NBR
5.	Filter core	stainless steel
4.	Filter screen	stainless steel
3.	Nut	stainless steel
2.	Bolt	stainless steel
1.	Body	Cast iron
No	COMPONENT	MATERIAL

f	2	2	2	2	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4
n-φd	4-φ14	4-φ14	4-φ14	4-φ18	4-φ18	4-φ18	4-φ18	4-φ18	8-φ18	8-φ18	8-φ23	12-φ23	12-φ28	12-φ28	16-φ28	16-φ31	20-φ34	20-φ37	
t	14	16	16	18	18	20	20	22	22	24	24	26	32	32	36	38	42	48	
φG	45	58	68	78	88	102	122	138	158	188	212	268	320	370	430	482	609	720	
φC	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525	650	770	
φD	95	105	115	140	150	165	185	200	220	250	285	340	405	460	520	580	715	840	
H	120	140	150	170	190	220	290	310	360	430	550	620	700	800	850	900	1100	1300	
L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100	1250	1450	
DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	500	600	